

# PLAN SHARING: SHOWCASING COORDINATED UAV FORMATION FLIGHT

Henry Hexmoor, Swetha Eluru, Hadi Sabaa  
 Department of Computer Engineering and Computer Science  
 University of Arkansas  
 Fayetteville, AR 72701, USA.  
 {Hexmoor, seluru} @uark.edu  
 Keywords: Agents, Collaboration, UAV, benevolence, help

**ABSTRACT:** *Agent teaming and autonomy are foundational themes in multi-agent systems. Agents may work as singletons or they may work in environments where other agents exist. In multi-agent systems, agents may form teams by sharing common goals with other agents. For collaboration, cooperation is essential for any collaborative, group activity. Beyond coordination and judicious role assignment, cooperation enables members of a team to be aware and account for collection of their goals as well as performance of agents on individual goals. This paper presents a general model of cooperation and illustrates how it may enhance group performance. In this paper, we present results of application of the concept cooperation in a simulated swarm of reconnaissance urban UAVs that are tracking vehicles in an urban environment.*

## 1. Introduction

An agent is defined as an autonomous, problem-solving computational entity capable of effective operation in dynamic and open environments (Luck and Griffiths, 2003). A multi-agent system is a system of agents that exhibit social rationality, normative patterns, and values, among themselves within an environment (Hexmoor, 2003).

Typically, each agent in a multi-agent system possesses incomplete information for solving a problem with limited global knowledge. Therefore, agents interact with others to gather information and to act upon that information to collectively solve a problem. *Collaborative*, behavior-coordinated activity involves participants to work jointly with each other to satisfy a shared goal that often yields more than the sum of individual actions, (Grosz and Sidner, 1990). It may be distinguished from both interaction and simple coordination in terms of the commitments agents make to each other (Grosz and Kraus, 1996).

A theory of collaboration must therefore account for not only intentions, abilities, and knowledge about action of individual agents, but also their coordination in group planning and group acting. Furthermore, it must account for the manner in which plans may incrementally formed and executed by the participants.


Agents may have different beliefs about the methods for performing an action or to achieve a desired state. Pollack argued against a view of plans as purely data-structures

(Pollack, 1990) i.e., a plan is more appropriately viewed as a set of partially ordered actions that, when performed under appropriate conditions, lead to a specified new state of the world. She has argued for a view of plans as mental states that are necessary for plan interference. Having a plan does not merely require the know-how to perform a behavior, but it also includes possessing the intention to perform the actions entailed.

To adequately model cooperation it is necessary both to accommodate differences among beliefs of individual participants and to distinguish between *knowledge about* action performance and the *intention to act*. Agents may differ not only in their beliefs about the strategies to perform an action and the state of the world, but also in their assessments of the ability and willingness of an individual to perform an action.

The shared plan formalization provides mental state specifications of both shared plans and individual plans. Shared plans are constructed by groups of cooperative agents and include subsidiary shared plans formed by subgroups as well as subsidiary individual plans formed by individual participants in the group (Lochbaum, 1994). The formalization distinguishes between complete plans with those in which all the requisite beliefs and intentions have been established and partial plans. In addition to the propositional attitude of intending to perform an action, it introduces the attitude of intending that a proposition be held.

Agents can enhance their fitness by mutual help rather than by competition, as is observed in nature (Benton, 2001). This assumes that resources adequate for both exist, or are created by interaction and sharing their information. This enhances the process of working together toward a common goal; sharing effort, expertise and resources to achieve mutually desirable outcome.

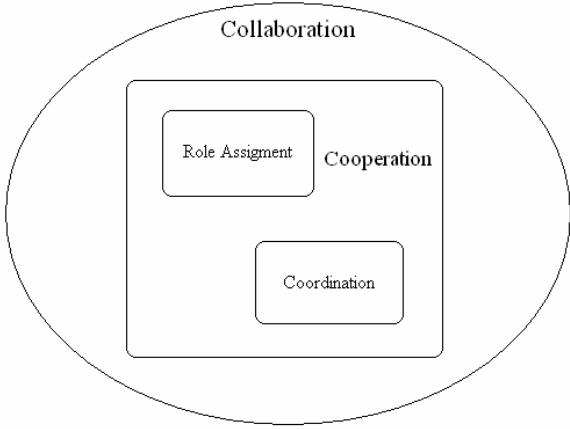

**Figure 1.** Collaboration subsumes Cooperation and Cooperation subsumes both Coordination and Role assignment. [Inspired by (Tuomela, 2000)]

Figure 1 illustrates that the coordination process and role assignment are subsets of the process of cooperation. The cooperation process in turn is a part of the collaboration process.

Agents need to organize themselves in a manner that permits them to perform their tasks efficiently. A malformed organization will affect the entire multi-agent system. When multi-agent systems change state, the agents in the system should be able to organize themselves according to the changes by sharing information amongst themselves. When this is not accomplished, cooperation should be adapted in order to avoid disruption in the multi-agent system.

We have applied this concept to a simulated swarm of reconnaissance UAVs that are tracking vehicles in an urban environment with details discussed in Section 3.

This paper offers an approach to adapt cooperation in multi-agent systems. The main focus will be particularly on the cooperation among agents who work together for a particular task while using the plan sharing techniques which enhances the cooperation. Rudimentary metrics are developed to gauge the effect of collaboration on system performance.

The novelties of this paper in the following areas:

- Superior strategies for a given set of agents to work together
- A process by which the agents are integrated into a team, regulated to achieve team goals
- Agent performance to contribute to a high functioning system.
- Agent evaluation during the process of cooperation.
- Quantifying the effect of cooperation on the goals and the system performance.

In the remainder of this paper, Section 2 contains related work in the area of cooperation between the agents and also the application of the cooperation in and multi UAV interactions.

In this section, issues related to cooperation, necessity of cooperation and plan sharing among the agents are discussed. Application of cooperation and collaboration in our implemented UAV swarm is presented in section 3. Section 4 outlines a novel, generalized cooperation algorithm. We describe the importance of cooperation by illustrating how agent plan and plan sharing enhances the cooperation process. Section 5 briefly describes incorporation of collaboration in our UAV swarm. We then present experiments and results in section 6. Section 7 provides concluding remarks and suggestions for future work.

## 2. Related Work

Since there is a growing demand for robust and intelligent multi-agent systems, a vast body of work is available in the area of group activity (Hexmoor, 2003). A Multi-agent system is a system of agents that exhibit social rationality, normative patterns, and values, among themselves within an environment (Hexmoor, 2003). Each agent has incomplete information for solving a problem with limited global knowledge. Therefore, agents within a multi-agent system interact with other agents to gather information and to act upon that information to solve a problem.

According to Alonso, two agents may depend on one another in one of sixteen ways (Alonso, et. al., 1999). Sharing a goal achievement is central to forming agent teams (Cohen, et.al., 1997). Agents that want to maximize their gain may consider cooperation in order to lower their workload and temporal penalties (Beer et. al, 1999). Hexmoor extended the explorations for teaming (Hexmoor and Duchscherer, 2001).

An understanding of collaboration is essential to modeling the intentional context of discourse and its structure (Grosz and Sidner, 1990; Lochbaum, et.al., 1990 and Lochbaum, 1995, 1998). As a theoretical framework for modeling collaboration (Grosz and Kraus, 1996), it is evident that collaborative activities require a complex set of parameters that must be taken into account. The primary focus while attempting to achieve a goal, is on understanding the states of mind of the individuals who participate in collaboration, and on properties of the group. An overview of the model designed by Grosz provides a setting in which to examine the roles of parameters of agents on collaborative plans and activities (Grosz, 1999).

In this process, the *mutual* beliefs of the discourse participants: the amount of knowledge that each individual participant or all participants should have was discussed in, (Clark and Richard, 1981; Cohen, 1981) as well as differences in beliefs among participants in a discourse is important (Pollack, 1990).

Partial, individual plans are expanded to more complete plans through means-ends reasoning about intended goals. Cooperation mirrors this reasoning process, i.e., plan-

collaboration process. However, their expansion requires communication and negotiation as well as means-ends reasoning about the way in which to perform the group action (Grosz and Kraus, 1999).

By and large, communication and collaboration are disjoint; yet interdependent activities. Communication is inherently a collaborative activity (Grosz and Sidner, 1990; Korta, 1995 and Arrazola, 1996). An agent communicates to achieve a purpose. The motivations underlying communication provide structure for an agent discourse (Mataric, 1993). Collaboration, in turn, requires communication. Both communication and collaboration can be used parametrically in agent design. As a result, theories and models of collaboration are essential to understanding and modeling intentional states and the intentional attributes of discourse (Grosz and Sidner, 1990; Lochbaum, Grosz and Sidner, 1990 and Lochbaum, 1995, 1998), which use the Shared Plans formalization of collaboration, as the basis of a computational model for recognizing the intentional structure of disclosure.

Building directly on Lochbaum's use of Shared plans, others have constructed a collaborative graphical interface to a travel planning system. These applications use the logical specification provided by shared plans to constrain utterance generation and interpretation, e.g., (Rich and Sidner, 1994) and (Sidner and Rich, 1997).

Furthermore, in a collaborative activity, collaboration commonly occurs within the process of planning. Each agent may have incomplete or incorrect beliefs. Furthermore, their beliefs about each other's beliefs and capabilities to act may be incorrect. As a result, a collaborative act cannot be modeled simply by aggregating plans of individual agents.

Therefore, rather than modeling plan recognition, what must be modeled is the augmentation of beliefs about the actions of multiple agents and their intentions. Thus, Grosz and Sidner modified and expanded the Shared plan model of collaborative behavior originally proposed in (Grosz and Sidner, 1990), to present an algorithm for updating an agent's beliefs about a partial, shared plan, and describe an initial implementation of this algorithm in the domain of network management for augmenting an evolving jointly-held plan.

For a multi-agent collaborative control, Chandler and Pachter conclude that decision making through planning and management are the essence of the autonomous control problem (Chandler and Patcher, 1998).

To improve teamwork, we need to better understand the nature of coordination and its ramifications. This is explained with in-depth analysis of the coordination that is required to carry on a conversation.

For investigation of cooperative control of multiple UAVs, a simulator is offered (Chandler and Rasmussen, 2001). This is

implemented in a hierachal manner where inter-vehicle communication is explicitly modeled. During construction of UAV swarm, issues concerning memory usage and functional encapsulation were also considered. This simulation has been instrumental in evaluating cooperative control strategies for UAVs.

Control Automation and Task Allocation (CATA), which is a multiple-vehicle/multi-agent simulation was developed at the Boeing corporation. This simulation has been used in several early cooperative control studies, such as in (Chandler and Rasmussen, 2001). Since CATA was relatively large and written in C++, it proved to be difficult for widespread use.

A number of other UAV simulations exist. Their payload weight carrying capability, their accommodations (volume, environment), their mission profile (altitude, range, duration) and their command, control and data acquisition capabilities varies significantly; for a brief survey, See (Lua, et. al., 2003).

Recent military operations have showcased the abilities of UAVs where they provide intelligence, surveillance, reconnaissance, and command, and control information to commanders in real-time or near real-time format. The success of UAVs has raised questions about future roles for UAVs in the military operation. These roles include weaponizing UAVs and using UAVs for target designation; these missions are commonly grouped under the title of unmanned combat aerial vehicles (UCAVs), see (Raymond, 2000).

The ability to control many remote entities with minimal user intervention has many military and commercial applications. Current techniques for controlling UAVs, which rely on centralized control and on the availability of global information, are not suited to the control of UAV swarms, owing to the complexity that arises from the interactions between swarm elements (Stover and Gibson, 1997).

Traditional, centralized approaches, frequently lead to exponential increases in communication bandwidth requirements and in the size of the controlling swarm. In contrast, swarms of simple biological or artificial organisms exhibit rich, emergent behaviors, without the need for centralized control or global communication (Boanabeau, et.al., 1999). Controlling UAV swarms via human supervision is of great interest to the US military.

For the coordination as explained earlier, allocation of tasks to the UAV during their flight is one of the criteria in achieving the joint activity. Work for optimizing the task allocation problem for a fleet of Unmanned Aerial Vehicles with tightly coupled tasks and rigid relative timing constraints is available in (Alighanbari, et.al., 2003). The overall objective is to minimize the mission completion time for the fleet, and the task assignment must account for differing UAV capabilities and no-fly zones.


For many vehicles, obstacles, and targets, fleet coordination is a complicated optimization problem and the computation time increases rapidly with the problem size (Pachter, et.al, 2002 and Richards, et.al., 2001).

Work on particle swarms (Parker, 1993), cultural algorithms (Reynolds and Chung, 1996), and bacterial chemo taxis algorithms (Muller, et. al., 2002) has generalized the idea for abstract, n-dimensional cognitive spaces that make up self-organizing particle systems.

Interactions between particles result in complex global behavior which emerges from the join actions and relatively simple behaviors of the individual particles, thereby exhibiting self-organization. These properties have been used in applications in computer graphics (Reynolds, 1987, 1999), multi-robot team control (Balch and Arkin, 1998; Fredslund and Matartic, 2002; Winder and Reggia, 2004; Vail and Veloso, 2003), and numerical optimization (Parker, 1993). We have implemented an Urban UAV testbed, described in the following section.

### 3. An Urban UAV surveillance system

UAVs in our simulation are modeled as powered aerial vehicles sustained in flight by aerodynamic lift and guided without an onboard crew. In general, a UAV may be expendable or recoverable, and can fly autonomously or be piloted remotely. When working together as a group, UAVs resemble a multi-agent system. UAVs interact with other UAVs and perform their tasks collectively.

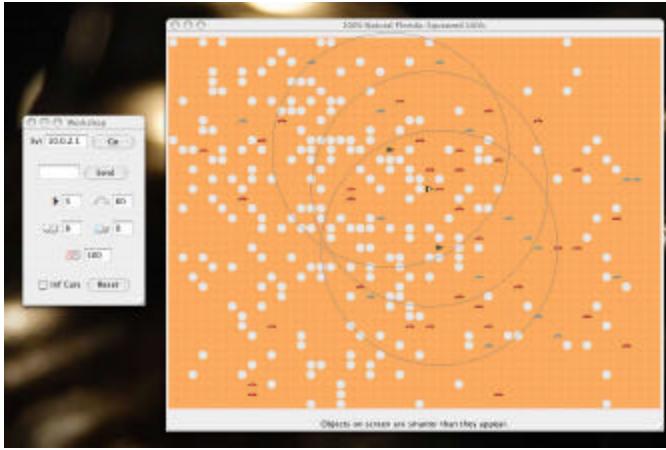

**Figure 2.** Snapshot of our UAV simulation screen

Figure 2 depicts a typical flight pattern of a swarm of UAVs tracking terrestrial vehicles. The “white” circles depict cloud cover. Vehicles may temporarily disappear from UAV view when they are traveling below the randomly appearing clouds. This makes tracking them more challenging. UAVs need to interact to improve their collective tracking capability. Vehicles as well as cloud patches appear randomly in our simulation for

a measure of realism. The system maintains the track quality, i.e., the number of cycles tracked, for each target, which is described in more detail as the Performance list and denoted as **Perf []** in Section 4. Upon entry of a UAV in the theater, it determines a number of targets, i.e., vehicles, to track largely based on proximity. This is called a UAV Preference list denoted as **Pref []**, also described in Section 4.

Elsewhere, (Hexmoor, et. al., 2005) we have described how a human supervisor may guide and alter interactions among UAVs to improve system tracking. This is achieved primarily via parameters that affect a UAV social personality. These consist of four parameters. *Dedication* parameter determines how committed the UAVs are to reacquire lost targets.

*Sociability* parameter determines how gregarious UAVs will be. A UAV with a positive sociability will tend to operate in proximity to other UAVs. Conversely, a negative sociability (i.e., anti-social behavior) will make the UAV shun others and operate independently. *Conformity* parameter determines how quickly the UAV reacts to operator suggestions. Finally, *Disposition* parameter determines how quickly a UAV will become frustrated with the negotiation process.

In contrast, herein we focus on a single parameter of *Cooperation level*, denoted as **CL**, further described in Section 4. This parameter is used to adjust the level of collaboration among UAVs. We have explored setting **CL** at four levels. The results of a set of experiments are presented in Section 6.

### 4. A Proposed Cooperation Model

Although we used the same collaboration model, in this section we describe our collaboration model in abstract terms and will not refer to UAVs or target tracking. Our model chiefly concentrates on how agents team up to form a collaborative pattern to achieve their goals.

Upon entry of an agent, it determines its own intentions for a plan to achieve its goal. Each agent has its own individual plan for achieving its goals. The common goal refers to the collective set of agent goals to be achieved.

Each agent has knowledge of its environment in the form of beliefs. An agent will desire to perform its individual tasks by assessing its knowledge of the environment. After environmental assessment and determination of a course of action (i.e., a plan), it will form intentions to achieve its selected goals.

Next, we outline our model in general terms. Let there be  $n$  agents in a given environment. Assume  $m$  goals are to be achieved at any instant in time.

After updating beliefs, an agent compiles a list of goals to be achieved. By default, an agent will wish to follow the goal order in its list. Each agent forms a course of actions.

We consider all agents to be identical in every respect. Furthermore, agents are assumed to possess identical capabilities, and limitations. To recapitulate, in an environment with a team with  $m$  goals, each agent has its own courses of actions gleaned from its own personal observations.

Each agent may independently pursue its individual intentions. In some circumstances, agents might be successful in reaching their goals independently. However, this lack of interdependence might adversely affect achievement of common goals.

Next, we outline a plan sharing process. Each agent shares its intentions, desires, and also the course of action in which it wants to proceed. In other words, each agent has global knowledge of other agent's intentions and desires, and also all the goals which have been already achieved. This includes updating of the changed intentions of all agents. If an agent changes its desire and thus changes its intentions, this is shared with other agents in the environment.

Cooperation is uniformly introduced in the process of achieving goals. Agents are considered to have the same cooperation level. The system level performance quantified as the overall cumulative performance of all the agents working in the system; that is, the number of goals processed in the duration of time.

During the cooperation process, each agent in each cycle considers its preferred intentions, and the performance of each goal in the environment and also the predetermined cooperation level in the system. Cooperation level in our model is a system parameter for cooperativeness, shared by all agents. In each cycle, when agent decision making process enters consideration of the cooperation level in the environment, it generates a new *bid order* list which will be considered as the new intention list for each agent.

This new intention list is generated starting from the preference list of the particular agent and changes this preference list to favor the goals with low performance levels biased with the cooperation level.

For example, if a particular agent has a preference list of goals, say 3, 6, and 7. Assume the relative cumulative performance levels of these goals are 9, 21, and 11 respectively. Then without cooperation, agents may revise their goal list by comparing their preference list with the goal performance list. The revised list will be 6, 7 and 3. That means, here the goal with less performance is given the least priority.

When cooperation is introduced in this example and with some global value for the cooperation level, the new, revised intention list will not only depend upon the performance of the goals but it will also depend on the cooperation level among agents. We assume cooperation level to encapsulate an


implicit notion of benevolence where agents tend to help one another achieve low performing goals. With cooperation, the revised example goal list will be 3, 6, 7. That means, here the goal with less performance is given the highest priority.

Assume an agent has a goal  $g$  to be achieved and it has been trying it for a long period of time. Meanwhile, the agent concentrates only on the present goal, and by the time it plans to achieve the goal, which is the next one in its intention goal list, that goal might be unavailable for the agent due to unforeseen reasons. Here, benevolent agents might come forward to achieve this particular goal. Agents come forward even if goal  $g$  is in less appealing due to its lack of performance.

Cooperative agents will act out their benevolence by striving to achieve poorly performing goals in order to exhibit cooperation. With the largest cooperation level values, agents will consider achieving the poorest performing goals. The summary of our model is thus follows.

Consider an agent A in a given environment. It possesses its own belief, desire and intentions for achieving goals. Each agent constructs its own preference list of goals it wants to follow along with its individual plan. Let us denote this as  $\text{Pref}[A]$ . Each goal in the list of goals of the environment is continually assessed and ascribed a performance level. This performance level is given depending on the number of times it has been attempted by agents in the environment. To summarize and denote, each goal G has its instantaneous performance value codified with  $\text{Perf}[G]$ .

In each cycle, each agent A considers its  $\text{Pref}[A]$ ,  $\text{Perf}[G]$ , and Coop level. As shown in the Figure 3, a new *bid order list* for each agent is generated using performance and preference lists as input. If the cooperation level value is large the agent will prefer the poorest performing goals. The reordering of the agent preference list reflects the degree of the cooperation level.

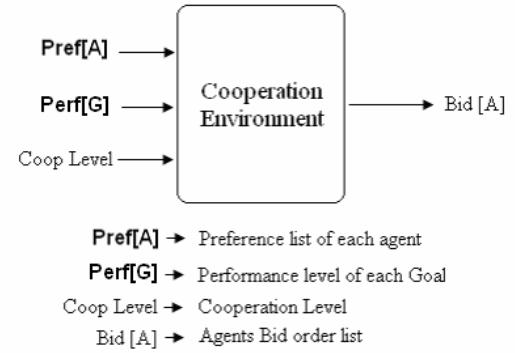

**Figure 3.** Parametric Cooperation

Figure 4 presents a pseudocode for our cooperation algorithm, which demonstrates how an agent cooperates. An agent A's bid list,  $B[ ]$ , is initialized to its preference list. CL is the cooperation level parameter set to a constant.

The reorder list is set to the size of the preference list Pref [A]. In each iteration, *reorder list* is computed by the given equation. The new reorder list is sorted and is assigned as the agent's new bid list. Intuitively, lack of performance is amplified by the cooperation level constant CL. Capability of agent [A] is the capability to perform the goal *i*.

```

1. B [] := Pref[A] // initialize bid list to preference list
2. CL = constant // cooperativeness level
3. reorder list = [ |Pref[A]| ] // the same size as Pref[A]
4. for(i = 0 ; i < [reorder] ; i++) {
    reorder of[i] = 1 - Perf[B[i]] * CL * Capability of[A, i]
    // capability is toward the goal
5. sort reorder[i]
6. B[i] = reorder[i]
```

**Figure 4.** Cooperation Algorithm

Suppose an agent's original preference list is [1, 2, 3] and the respective performance list of goals are [0.2, 0.7, 0.9]. Assume the cooperation level CL be set at 0.75. Reorder list is computed:

$$\text{For 1, reorder} = 1 - 0.2 * 0.75 = 1 - 0.15 = 0.75$$

$$\text{2, reorder} = 1 - 0.7 * 0.75 = 1 - 0.525 = 0.475$$

$$\text{3, reorder} = 1 - 0.9 * 0.75 = 1 - 0.675 = 0.325$$

After sorting, we have [0.325, 0.475, 0.75], thus the new bid list is [3, 2, 1]. In this example we assume all agents are equally capable toward all goals, i.e., Capability[A, *i*] = 1.0.

## 5. Implementation and Experiments

Our cooperation algorithm (Figure 4) was applied to the UAV swarm system described in section 3. Here UAVs are agents and the goals are targets. The environment with different paradigms and parameters are used to achieve the simulation and experiments. The Java programming language is used to code the algorithms and the Borland JBuilder was used as our IDE.


Initializing all the UAVs with similar capabilities created the multi-agent system. All targets are initialized with similar qualities as well. Each UAV has its own preference list of targets and performance list of all the targets in the preference list as mentioned in the algorithms. The initial positions of all UAVs are randomly generated. The preference list for each UAV is generated by the number of targets it's been able to sense in the environment. All the targets are mobile and keep moving.

The system is initially simulated without plan sharing and without cooperation. Then plan sharing process is introduced and system is simulated at different levels of cooperation i.e., the cooperation level (CL) shown in the algorithm is assigned with different values and then the system performance is captured by the simulation.

## 6. Results and Discussions


### UAVs with no Plan-Sharing and no Cooperation

We first examined the system performance behavior when agents were not sharing plans nor cooperating with each other as shown in Figures 5 and 6. UAVs proceed with tasks in their preference list as they enter the system. As there is no cooperation or plan-sharing among the UAVs, the targets untracked during the given time cycle are not substantially decreased. As shown in the Figure 5, the targets untracked reach a steady state of about 190, given 225 total number of targets in the system.

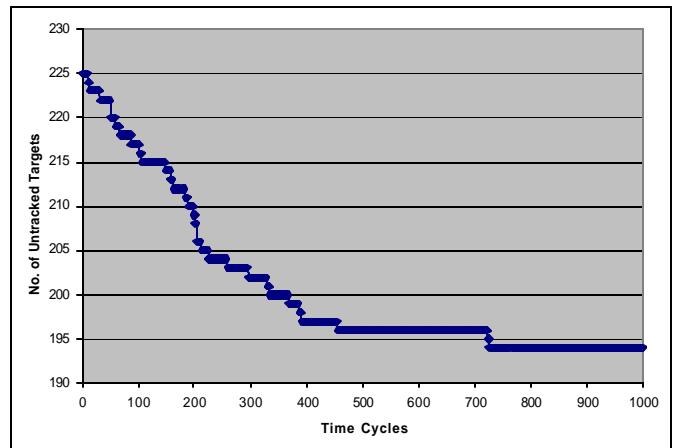

**Figure 5.** Untracked targets over time with no Plan Sharing and no cooperation

Figure 6 shows the cumulative number traces achieved, which is climaxed at about 332.

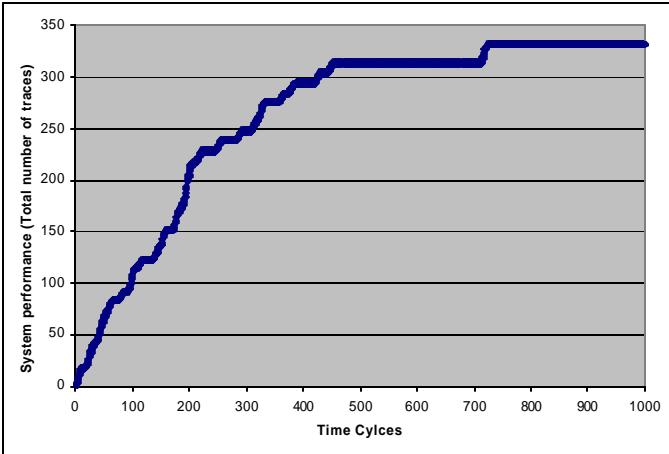


**Figure 6.** Total number of traces over time with no Plan-Sharing and no cooperation

These results motivated us to introduce plan-Sharing and Cooperation as discussed in Section 5.


#### UAVs with Plan-Sharing but no cooperation

Next, we first introduced Plan-Sharing among UAVs where they share their preference list with every other UAV present in the system. Although there is no explicit cooperation, plan sharing helps UAVs account for a larger number of targets. An implicit style of cooperation takes place by targets that are tracked independently by multiple UAVs.

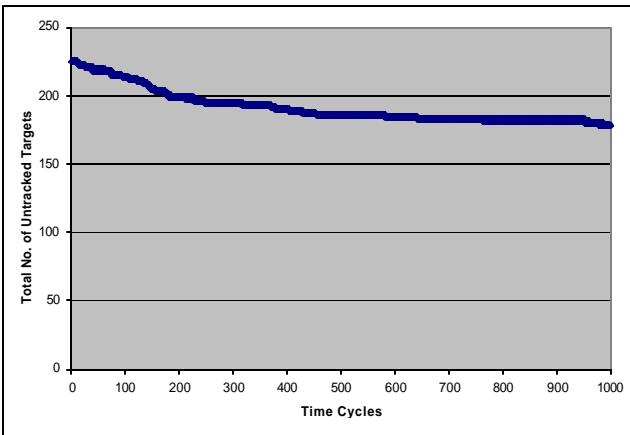

**Figure 7.** Change in untracked targets over time with Plan-Sharing but no cooperation


The decrease in the total number of untracked targets can be observed in Figure 8, at about 174, which is lower than without plan-sharing. The enhancement in the system performance can also be observed as the total number of traces has increased up to 1248 in the Figure 8.

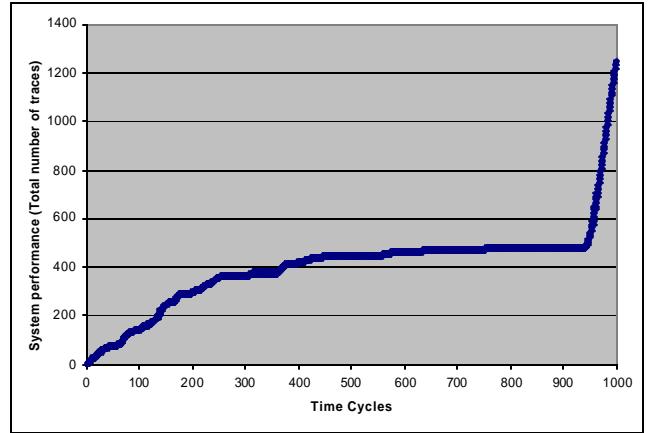

**Figure 8.** Total number of traces over time with Plan-Sharing but no cooperation (plan sharing is introduced at about cycle number 950, at “the knee of the curve”)


#### UAVs with Plan-Sharing and with the lowest level Cooperation

Next, we introduced plan sharing as well as the lowest level cooperation. UAVs work together and generate their own bid list as explained in the algorithm in section 5. Here the cooperation level threshold is set to the lowest level. The results are depicted in Figures 8 and 9.

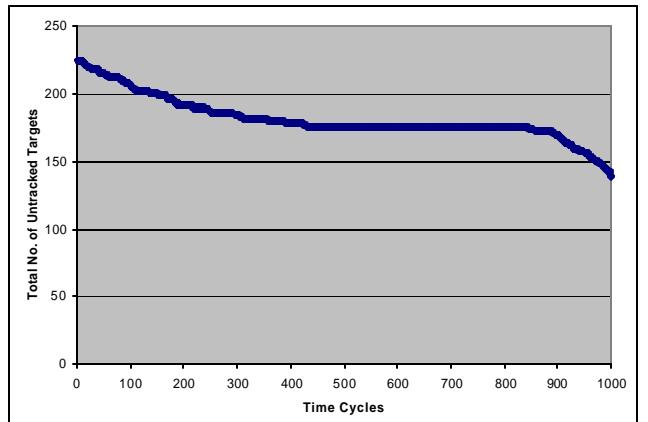

**Figure 9.** Untracked Targets over time with Plan-Sharing and with the lowest level cooperation


As shown in Figure 9, the total number untracked targets is reduced to about 139. The system performance is shown in Figure 10 where the total number of collective system traces has increased to 2896.

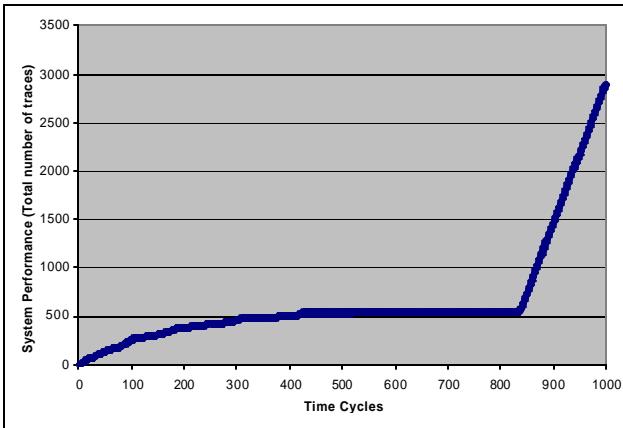

**Figure 10.** Total number of traces over time with Plan-Sharing and with the lowest cooperation level (low cooperation is introduced at about cycle number 850, at “the knee of the curve”)


#### UAVs with Plan-Sharing and medium level cooperation

The cooperation level is turned up to the medium level next. With UAV bid list revision due to cooperation, performances are shown in Figures 11 and 12.

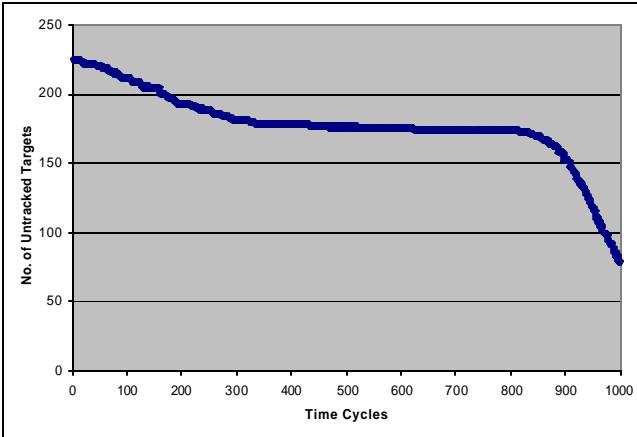

**Figure 11.** Untracked Targets over time with Plan-Sharing and medium level cooperation


Total number of untracked targets has further decreased to 79 as shown in figure 11. System performance as the total number of traces has increased to 3445.

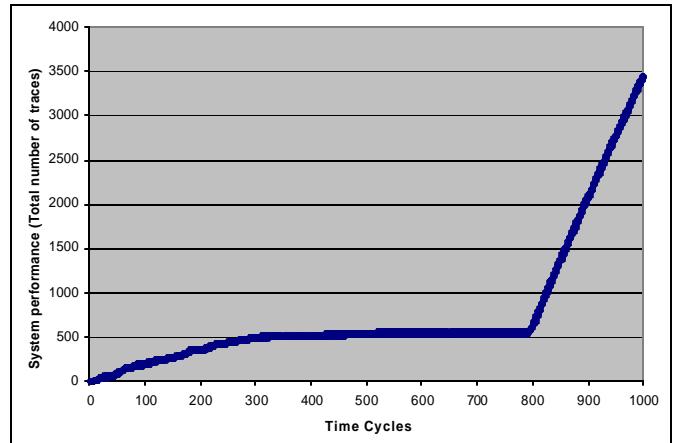

**Figure 12.** Total number of traces over time with Plan-Sharing and with medium level cooperation


#### UAVs with Plan-Sharing and medium high level of cooperation

At the medium high cooperation level, UAV bid lists were more seriously revised and the results are shown in Figures 13 and 14.

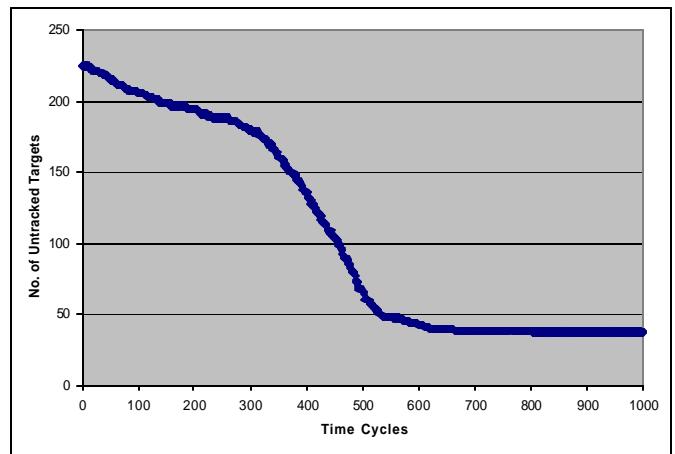

**Figure 13.** Untracked Targets over time with Plan-Sharing and at medium high cooperation level

The total number of untracked targets is further decreased to about 59 and shown in Figure 14 the system performance in has increased up to 4194.

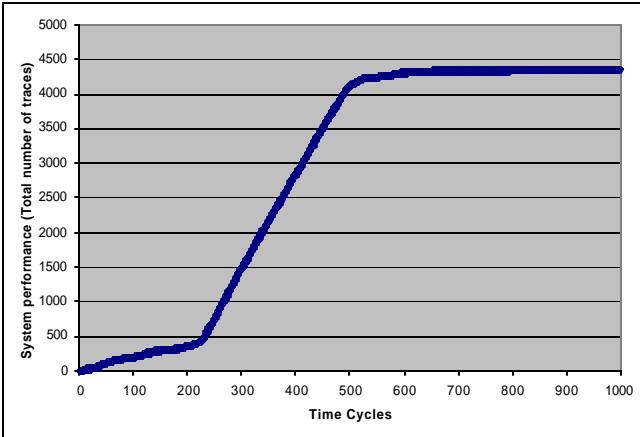


**Figure 14.** Total number of traces over time with Plan-Sharing and at medium high level cooperation

#### UAVs with Plan-Sharing and with the highest level cooperation


Lastly, we increased the cooperation level to the highest level and the results are shown in Figures 15 and 16.

The total number of untracked targets, shown in Figure 15, is diminished to 14. The system performance, shown in Figure 16 reached 5353 traces.

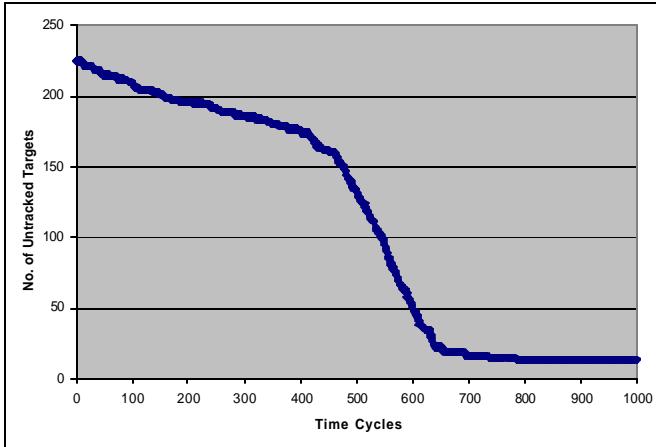

**Figure 15.** Untracked Targets over time with Plan-Sharing and at the highest cooperation level

It is observed that system performance increases by increasing level of cooperation.

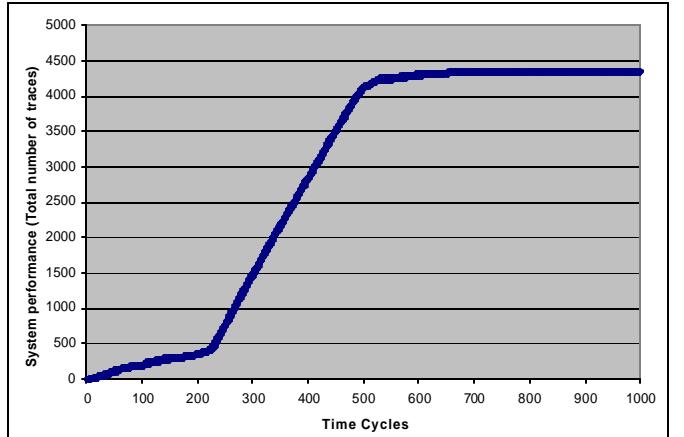

**Figure 16.** Total number of traces over time with Plan-Sharing and the highest cooperation level

## 7. Conclusions and Future work

The primary focus of this paper was on an implicit sense of plan sharing where agents modify their plans in light of other agent's plans. Communication is a key form of interaction in multi-agent systems, where multiple agents collaborate to attain a common goal.

The concept of collaboration was elaborated in a strategy for cooperation. Certain cooperation techniques are better suited for our experiments. Plan sharing and collaborative plan refinements clearly demonstrated improved performance.

Further work will consider agents at different capability as well as plan and goal priorities. Along with deontological notions of request and permission for collaboration we will explore overlaps between collaboration, autonomy, and benevolence (Hexmoor, 2003).

## 8. References

- Alighanbari M., Kuwata Y., and How J. P., "Coordination and Control of Multiple UAVs with Timing Constraints and Loitering," Space Systems Laboratory, IEEE proceedings 2003.
- Alonso G., Schuld H., Schek H.J., "Transactional Coordination Agents for Composite Systems," Proceedings of the International Database Engineering and Applications Symposium (IDEAS'99). Montreal, Canada, August 1999.
- Arrazola X., "Collective Action: Logical Foundations for Interaction," report no. ILCLI-96-FCSAI-1. Donostia – San Sebastian: ILCLI, 1996.
- Balch T. and Arkin R., "Behavior-based Formation Control for Multi-robot teams," IEEE Robotics and Automation, 14(6), 926-939. 1998.
- Beer J. M., Whatley J., "Group Project Support Agents for helping students work online," HCI International 1999, Munich, Germany, Lawrence Erlbaum, London.1999.
- Benton M.J., "Biodiversity on land and in the sea," Geological Journal, 36:211-230, 2001.
- Bonabeau E., Dorigo M. and Theraulaz G., "Swarm Intelligence: From Natural to Artificial Systems," New York, NY: Oxford University, 1999.
- Chandler R., and Pachter M., "Research Issues in Autonomous Control of Tactical UAV's," proceedings of the American Control Conference, 1998, Vol.: 1, 24-26, pp.394-398. June 1998
- Chandler P., Schumaker C., Rasmussen S., "Task Allocation for Wide Area Search Munitions via Network Flow Optimization," AIAA GNC, Aug 2001.
- Clark R., "Uninhabited combat aerial vehicles: airpower by the people, for the people, but not with the people," Maxwell air force base al: air university press CADRE paper, 2000.
- Cohen, D.M., Moridae. In W. Fischer, G. Bianchi and W.B. Scott (eds), "FAO species identification sheets for fishery purposes," Eastern Central Atlantic; fishing areas 34, 47 (in part). Vol. 3, FAO, Rome, 1981.
- Cohen, P. R., Levesque H. R., and Smith I., "On team formation," Hintikka, J. and Tuomela, R. (Eds.) Contemporary Action Theory. Synthese, 1997.
- Fredslund J. and Mataric M., "A General Algorithm for Robot Formations Using Local Sensing and Minimal Communication," IEEE Transactions on Robotics and Automation, 18(5):837-846. 2002.
- Grosz. B. and Sidner. C., "Plans of Discourse," In P. Cohen et.al. eds., Intentions in Communication. MIT press. Forthcoming, 1990.
- Grosz B., Sidner C. and Loachbaum K. E., "Models of plans of support communication: An initial report," In proceedings of AAAI-90, Boston, MA, 1990.
- Grosz B. and Kraus S., "Collaborative Plans for Complex Group Action," In Artificial Intelligence. 86(2), pp. 269-357. 1996.
- Grosz B., and Kraus, S., "The Evolution of SharedPlans," In Foundations and Theories of Rational Agencies, A. Rao and M. Wooldridge, eds. pp. 227-262, 1999.
- Hexmoor, H., Duchscherer H., "Efficiency as a Motivation to Team," FLAIRS Conference 2001: 49-52, 2001.
- Hexmoor, H., "Weekly Dependent Agents may rely on their luck or Collaboration: A Case for Adaptation," In Proceedings of The Society for the Study of Artificial Intelligence and the Simulation of Behavior (AISB), York, UK, 2003.
- Henry Hexmoor, Agent Autonomy in a group, A special issue of Journal of Connection Science, Taylor and Francis, 2003.
- Hexmoor, H., McLaughlin, B., and Baker, M., Swarm Control in Unmanned Aerial Vehicles, In Proceedings of International Conference on Artificial Intelligence (IC-AI), CSREA Press, 2005.
- Korta, K. and Larrazabal J. M. (eds.) "Semantics and Pragmatics of Natural Language: Logical and Computational Aspects," Proceedings of the Donostia-Toulouse 1993 Workshop. Donostia: ILCLI Series No. 1. (ISBN: 84-920104-3-6), 1995.
- Lochbaum K., "Using Collaborative Plans to Model the Intentional Structure of Discourse," PhD thesis, Harvard University, 1994.
- Lochbaum K., "The Use of Knowledge Precondition in Language Processing," In IJCAI95, Proceedings of the 14th International Joint Conference on Artificial Intelligence, pages 1260-1266, 1995.
- Lochbaum K., "A collaborative planning model of intentional structure," Computational Linguistics 24(4). 1998.
- Luck, M. and Griffiths, N., Coalition Formation Through Motivation and Trust. In Proceedings of the Second International Conference on Autonomous Agents and Multi-agent Systems (AAMAS 2003), ACM Press, 2003.
- Lua, C.A., Altenburg, K., and Nygard, K.E., Synchronized Multi-Point Attack by Autonomous Reactive Vehicles with

- Simple Local Communication, Proceedings of IEEE Swarm Intelligence Symposium, 2003., 2003.
- Mataric, M.J., *Kin recognition, similarity, and group behavior.* In Fifteenth Annual Cognitive Science Society Conference, pages 705–710. Lawrence Erlbaum Associates, June 1993.
- Muller, S., Marchetto J., Airaghi, S. and Kourmoutsakos, P., “*Optimization Based on Bacterial Chemo taxis,*” IEEE Transactions on Evolutionary Computation, 6:16-29. 2002.
- Parker, L., ‘*Designing Control Laws for Cooperative Agent Teams,*” Proc. IEEE International Conference on Robotics and Automation, 3:582-587. 1993.
- Patcher, M., Chandler, P., Swaroop, D., Fowler, J., “*Complexity in UAV cooperative control,*” ACC 2002. pp. 1831-1836. 2002.
- Pollack. M. E., “*Plans as complex mental attitudes,*” in P. Cohen et. al., eds., Intentions in Communication. MIT press. Forthcoming, 1990.
- Raymond, R., Hill S., Dougherty, and Moore, J.T., “*Model Signal Latency Effects Using Arena,*” Proceedings of the 2000 Winter Simulation Conference. 2000.
- Reynolds, C., Flocks, Herds and Schools, “*Computer Graphics,*” 1987, 21:25-34. 1987.
- Reynolds, R., and Chung, C., “*A Test bed for Solving Optimization Problems Using Cultural Algorithms,*” Evolutionary Programming, 225-236. 1996.
- Reynolds, C., “*Steering Behaviors for Autonomous Characters,*” Proc. Game Developers Conf.1999, 763-782. 1999.
- Richards, A., Bellingham, J., Tillerson, M., and How, J., “*Multi-Task Allocation and Path Planning for Cooperative UAVs,*” Second Annual Conference on Cooperative Control and Optimization, Nov 2001.
- Rich, C., Sidner, C. L., , “*Adding a collaborative agent to graphical user interfaces,*” Symposium on User Interface Software and Technology, Proceedings of the 9th annual ACM symposium on User interface software and technology, 1994.
- Sidner, C. L., Rich C., “*COLLAGEN: When Agents Collaborate with People,*” Proceedings of the First International Conference on Autonomous Agents (Agents'97), 1997.
- Stover, J.A., and Gibson, R.E., ‘*Controller for Autonomous Device,*” US patent # 5, 642,467, Issued June 1997.
- Tuomela, R., “*Cooperation*”, Kluwer Academic, 2000.
- Reggia, J. and Winder, R., “*Distributed Partial Memories to Improve Self-Organizing Collective Movements,*” IEEE Transactions. SMC B, 2004, 34: 1967-1707. 2004.
- Vail D. and Veloso, “*Multi-Robot Dynamic Role Assignment and Coordination through Shared Potential Fields,*” In Multi-Robot Systems. A. Shultz, L. Parker, and F. Schneider (editors), Kluwer, 2003.